

LUXOR II

LED Downlight




Features & Benefits

- High performance SMD LED with integral driver
- 90mm Cutout
- IP44 rated for protection against water and dust
- IC-F approved and suitable for abutting and covering with building insulation material
- Smooth dimming compatible with most leading edge, trailing edge, universal and C-Bus dimmers
- Complete with 1.2m flex and plug
- 3 years warranty

Specifications

Power consumptions	10W
Input voltage	220-240V~,50/60 Hz
Dimmable	Yes
Colour appearance	-Warm white, -Cool White -Daylight
Colour temperature	3000K, 4000K 5000K
Colour rendering index (Ra)	80+
Lifetime	50,000 hours
Ingress protection	IP44
Insulation rating	IC-F

Photometry

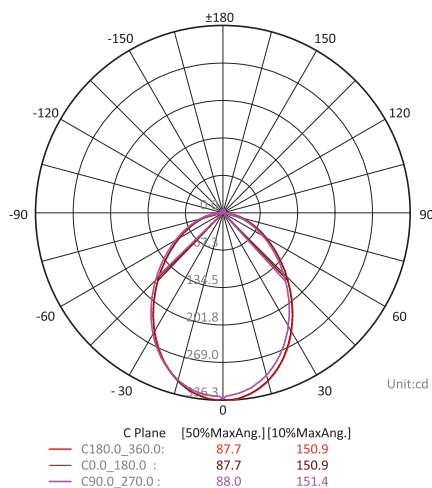


LUXOR II

LED Downlight



Dimensions

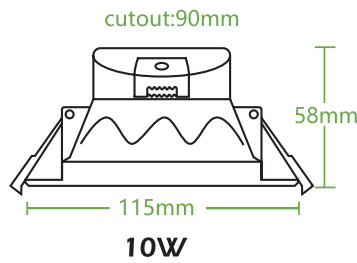

Ordering Information

Part No.	Barcode	Power	Colou	CCT	Flux	Finish	Cut out	Size	Bean Angle
RTL010DB01B01	6933164671868	10W	Warm white	3000K	800lm	White	φ90mm	φ115 X H58mm	90°
RTL010DB01D01	6933164671875	10W	Cool white	4000K	850lm	White	φ90mm	φ115 X H58mm	90°
RTL010DB01F01	6933164671882	10W	Day light	5000K	875lm	White	φ90mm	φ115 X H58mm	90°